




V.MAX[®] LED Panel Light



Model No: V-PLM1806R	Surface Treatment: WH
Power: SMD 6W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 480Lm	Working Temperature: -10~45° C
CRI: ≥80	IP: 20
Beam Angle: 120°	Body Size: Φ92*24mm
Color Temperature: 6500/4000/3000K	Hole Size: /




V-PLM1806R






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-PLM1806R	SMD 6W	480Lm	120°	WH	Φ92x24mm	/
V-PLM1812R	SMD 12W	960Lm	120°	WH	Φ140x24mm	/
V-PLM1818R	SMD 18W	1500Lm	120°	WH	Φ193x24mm	/

Model No: V-PLM1830R-A	Surface Treatment: WH
Power: SMD 30W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 3000Lm	Working Temperature: -10~45° C
CRI: ≥80	IP: 20
Beam Angle: 120°	Body Size: Φ220*45mm
Color Temperature: 6500/4000/3000K	Hole Size: /



V-PLM1830R-A



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-PLM1830R-A	SMD 30W	3000Lm	120°	WH	Φ220x45mm	/
V-PLM1840R-A	SMD 40W	4000Lm	120°	WH	Φ300x47mm	/




LED Panel Light V.MAX[®]



Model No: V-PLQ2630R	Surface Treatment: WH
Power: SMD 30W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 2700Lm	Working Temperature: -10~45° C
CRI: ≥75	IP: 20
Beam Angle: 120°	Body Size: Φ225*35mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ200mm





V-PLQ2630R



Model No: V-PLM3030R	Surface Treatment: WH
Power: SMD 30W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 3000Lm	Working Temperature: -10~45° C
CRI: ≥80	IP: 20
Beam Angle: 120°	Body Size: Φ230*46mm
Color Temperature: 6500/4000/3000K	Hole Size: /



V-PLM3030R



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-PLM3030R	SMD 30W	3000Lm	120°	WH	Φ230x46mm	/
V-PLM3040R	SMD 40W	4000Lm	120°	WH	Φ290x46mm	/
MD-PLQ3430R	SMD 30W	2750Lm	120°	WH	Φ220x50mm	Φ190mm




V.MAX[®] LED Panel Light



Model No: V-PLQ2912R	Surface Treatment: WH
Power: SMD 15W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1300Lm	Working Temperature: -10~45° C
CRI: ≥80	IP: 20
Beam Angle: 120°	Body Size: Φ168*25mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ155mm



V-PLQ2912R






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-PLQ2903R	SMD 5W	220Lm	120°	WH	Φ88x25mm	Φ75mm
V-PLQ2906R	SMD 9W	540Lm	120°	WH	Φ117x25mm	Φ105mm
V-PLQ2912R	SMD 15W	1300Lm	120°	WH	Φ168x25mm	Φ155mm
V-PLQ2918R	SMD 24W	1800Lm	120°	WH	Φ222x25mm	Φ210mm

Model No: V-PLM1818S	Surface Treatment: WH
Power: SMD 18W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1500Lm	Working Temperature: -10~45° C
CRI: ≥80	IP: 20
Beam Angle: 120°	Body Size: 193*193*24mm
Color Temperature: 6500/4000/3000K	Hole Size: /



V-PLM1818S



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-PLM1806S	SMD 6W	480Lm	120°	WH	92x92x24mm	/
V-PLM1812S	SMD 12W	960Lm	120°	WH	140x140x24mm	/
V-PLM1818S	SMD 18W	1500Lm	120°	WH	193x193x24mm	/




LED Panel Light V.MAX[®]



Model No: MD-PLM1920R	Surface Treatment: WH
Power: SMD 20W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1400Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: Φ185*55mm
Color Temperature: 6500/4000/3000K	Hole Size: /



MD-PLM1920R






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-PLM1910R	SMD 10W	700Lm	120°	WH	Φ95x55mm	/
MD-PLM1915R	SMD 15W	1050Lm	120°	WH	Φ125x55mm	/
MD-PLM1920R	SMD 20W	1400Lm	120°	WH	Φ185x55mm	/
MD-PLM1930R	SMD 30W	2600Lm	120°	WH	Φ225x55mm	/
MD-PLM1940R	SMD 40W	3500Lm	120°	WH	Φ305x55mm	/

Model No: MD-PLM1940S	Surface Treatment: WH
Power: SMD 40W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 3500Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: 305*305*55mm
Color Temperature: 6500/4000/3000K	Hole Size: /




MD-PLM1940S



Products list




Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-PLM1910S	SMD 10W	700Lm	120°	WH	95x91x55mm	/
MD-PLM1915S	SMD 15W	1050Lm	120°	WH	125x121x55mm	/
MD-PLM1920S	SMD 20W	1400Lm	120°	WH	185x181x55mm	/
MD-PLM1930S	SMD 30W	2600Lm	120°	WH	225x221x55mm	/
MD-PLM1940S	SMD 40W	3500Lm	120°	WH	305x305x55mm	/

V.MAX[®] LED Panel Light

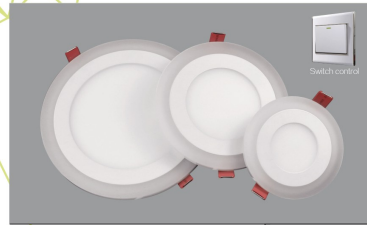

Model No: MD-PLQ1607R	Beam Angle: 120°
Power: SMD 5+2W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 420Lm	Working Temperature: -10~45° C
CRi: ≥80	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: Φ105*33mm
Ring Color: Red/Green/Blue/Pink	Hole Size: Φ85mm


MD-PLQ1607R






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-PLQ1607R	SMD 5+2W	420Lm	120°	WH	Φ105x33mm	Φ85mm
MD-PLQ1612R	SMD 9+3W	720Lm	120°	WH	Φ145x33mm	Φ115mm
MD-PLQ1618R	SMD 15+3W	1100Lm	120°	WH	Φ190x33mm	Φ170mm
MD-PLQ1624R	SMD 18+6W	1450Lm	120°	WH	Φ240x33mm	Φ215mm

Model No: MD-PLQ1624S	Beam Angle: 120°
Power: SMD 18+6W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1450Lm	Working Temperature: -10~45° C
CRi: ≥80	IP: 20
Color Temperature: 6500/4000/3000K	Body Size: 240*240*33mm
Ring Color: Red/Green/Blue/Pink	Hole Size: 215*215mm

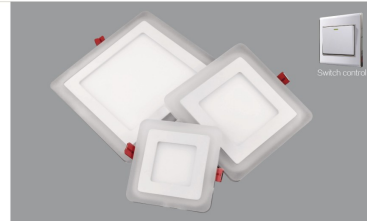


MD-PLQ1624S



Products list




Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-PLQ1607S	SMD 5+2W	420Lm	120°	WH	105x105x33mm	85x85mm
MD-PLQ1612S	SMD 9+3W	720Lm	120°	WH	145x145x33mm	115x115mm
MD-PLQ1618S	SMD 15+3W	1100Lm	120°	WH	190x190x33mm	170x170mm
MD-PLQ1624S	SMD 18+6W	1450Lm	120°	WH	240x240x33mm	215x215mm

LED Panel Light V.MAX[®]

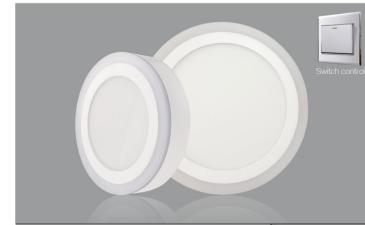

Model No: MD-PLM1607R	Beam Angle: 120°
Power: SMD 5+2W	Surface Treatment: WH
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 420Lm	Material: Alum+PC
CRi: ≥80	Working Temperature: -10~45° C
Color Temperature: 6500/4000/3000K	IP: 20
Ring Color: Red/Green/Blue/Pink	Body Size: Φ105*35mm

MD-PLM1607R






Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-PLM1607R	SMD 5+2W	420Lm	120°	WH	Φ105x35mm	/
MD-PLM1612R	SMD 9+3W	720Lm	120°	WH	Φ145x35mm	/
MD-PLM1618R	SMD 15+3W	1100Lm	120°	WH	Φ195x35mm	/
MD-PLM1624R	SMD 18+6W	1450Lm	120°	WH	Φ245x35mm	/

Model No: MD-PLM1624S	Beam Angle: 120°
Power: SMD 18+6W	Surface Treatment: WH
Input Voltage: AC220-240V 50/60Hz	Life Span: 25000H
Luminous Flux: 1450Lm	Material: Alum+PC
CRi: ≥80	Working Temperature: -10~45° C
Color Temperature: 6500/4000/3000K	IP: 20
Ring Color: Red/Green/Blue/Pink	Body Size: 245*245*35mm



MD-PLM1624S




Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-PLM1607S	SMD 5+2W	420Lm	120°	WH	105x105x35mm	/
MD-PLM1612S	SMD 9+3W	720Lm	120°	WH	145x145x35mm	/
MD-PLM1618S	SMD 15+3W	1100Lm	120°	WH	195x195x35mm	/
MD-PLM1624S	SMD 18+6W	1450Lm	120°	WH	245x245x35mm	/

V.MAX[®] LED Panel Light




Model No: MD-15193	Surface Treatment: WH
Power: SMD 18W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 1450Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: Φ170*20mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ160mm

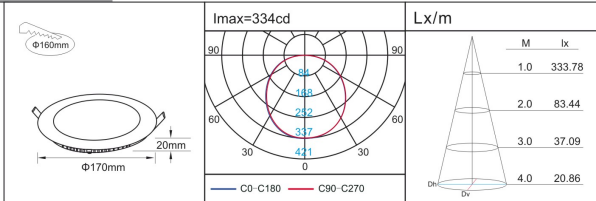

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-15191	SMD 5W	350Lm	120°	WH	Φ90x20mm	Φ75mm
MD-15198	SMD 9W	630Lm	120°	WH	Φ123x20mm	Φ110mm
MD-151910	SMD 12W	960Lm	120°	WH	Φ148x20mm	Φ135mm
MD-15193	SMD 18W	1450Lm	120°	WH	Φ170x20mm	Φ160mm
MD-15194	SMD 24W	1920Lm	120°	WH	Φ225x20mm	Φ210mm
MD-15197	SMD 30W	2400Lm	120°	WH	Φ300x20mm	Φ285mm

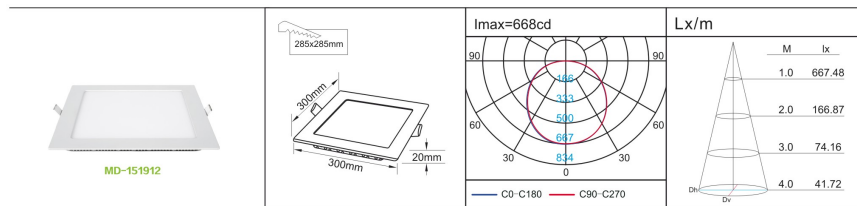


Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-15192	SMD 5W	350Lm	120°	WH	90x90x20mm	75x75mm
MD-15199	SMD 9W	630Lm	120°	WH	123x123x20mm	110x110mm
MD-151911	SMD 12W	960Lm	120°	WH	148x148x20mm	135x135mm
MD-15195	SMD 18W	1450Lm	120°	WH	175x175x20mm	160x160mm
MD-15196	SMD 24W	1920Lm	120°	WH	225x225x20mm	210x210mm
MD-151912	SMD 30W	2400Lm	120°	WH	300x300x20mm	285x285mm

LED Panel Light V.MAX[®]




Model No: MD-15197-MZ	Surface Treatment: WH
Power: SMD 30W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 2400Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: Φ300*36mm
Color Temperature: 6500/4000/3000K	Hole Size: /

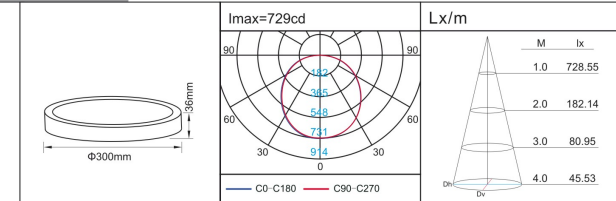

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-15198-MZ	SMD 9W	630Lm	120°	WH	Φ123x36mm	/
MD-15193-MZ	SMD 18W	1450Lm	120°	WH	Φ170x36mm	/
MD-15194-MZ	SMD 24W	1920Lm	120°	WH	Φ225x36mm	/
MD-15197-MZ	SMD 30W	2400Lm	120°	WH	Φ300x36mm	/

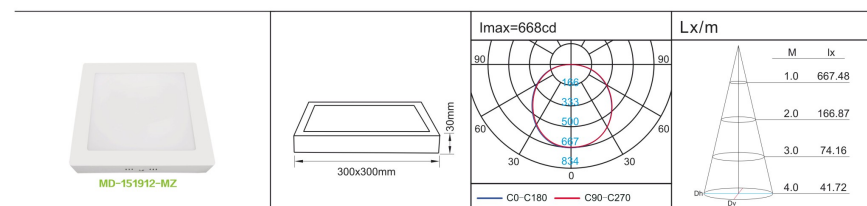

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-15198-MZ	SMD 9W	630Lm	120°	WH	123x123x36mm	/
MD-15193-MZ	SMD 18W	1450Lm	120°	WH	170x170x36mm	/
MD-15196-MZ	SMD 24W	1920Lm	120°	WH	225x225x36mm	/
MD-151912-MZ	SMD 30W	2400Lm	120°	WH	300x300x36mm	/


V.MAX[®] LED Panel Light



Model No: MD-0112A	Surface Treatment: WH
Power: SMD 12W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 900Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: Φ160*37mm
Color Temperature: 3 color	Hole Size: Φ125mm



MD-0112A

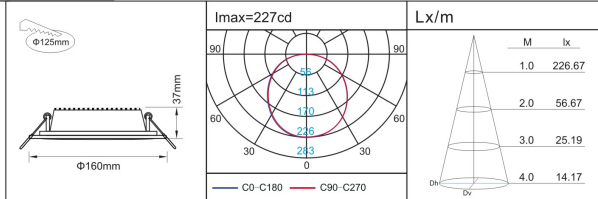


Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-0108A	SMD 8W	600Lm	120°	WH	Φ98x35mm	Φ75mm
MD-0112A	SMD 12W	900Lm	120°	WH	Φ160x37mm	Φ125mm
MD-0118A	SMD 18W	1500Lm	120°	WH	Φ198x35mm	Φ167mm

Model No: MD-0218A	Surface Treatment: WH
Power: SMD 18W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 1500Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: 198*198*42mm
Color Temperature: 3 color	Hole Size: 170*170mm



MD-0218A

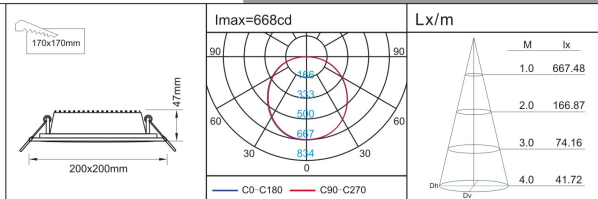

Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-0208A	SMD 8W	600Lm	120°	WH	108x108x35mm	75x75mm
MD-0212A	SMD 12W	900Lm	120°	WH	160x160x37mm	125x125mm
MD-0218A	SMD 18W	1500Lm	120°	WH	198x198x35mm	170x170mm


LED Panel Light V.MAX[®]



Model No: MD-0115B	Surface Treatment: WH
Power: SMD 15W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 900Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: Φ160*35mm
Color Temperature: 6500/4000/3000K	Hole Size: Φ125mm



MD-0115B

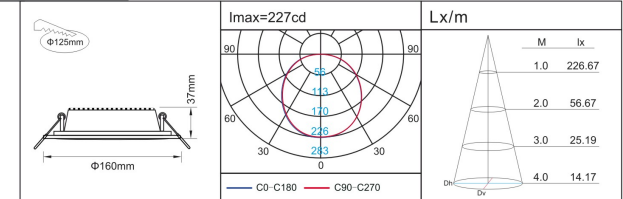


Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-0110B	SMD 8W	600Lm	120°	WH	Φ98x35mm	Φ75mm
MD-0115B	SMD 15W	900Lm	120°	WH	Φ160x35mm	Φ125mm
MD-0120B	SMD 20W	1500Lm	120°	WH	Φ198x35mm	Φ167mm

Model No: MD-0220B	Surface Treatment: WH
Power: SMD 20W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+Glass
Luminous Flux: 1500Lm	Working Temperature: -10~45° C
CRI: ≥70	IP: 20
Beam Angle: 120°	Body Size: 200*200*35mm
Color Temperature: 6500/4000/3000K	Hole Size: 170*170mm



MD-0220B

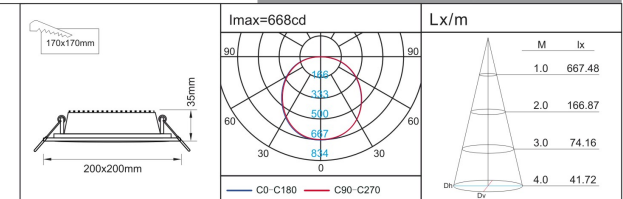

Products list


Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-0210B	SMD 8W	600Lm	120°	WH	120x120x35mm	90x90mm
MD-0215B	SMD 15W	900Lm	120°	WH	160x160x35mm	125x125mm
MD-0220B	SMD 20W	1500Lm	120°	WH	200x200x35mm	170x170mm

V.MAX[®] LED Gill Light





Model No: V-LDQ0196S	Surface Treatment: WH
Power: SMD 96W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 9600Lm	Working Temperature: -10~45° C
CRt: ≥80	IP: 20
Beam Angle: 120°	Body Size: 595*595*28mm
Color Temperature: 6500/4000/3000K	Hole Size: 575*575mm

575x575mm





V-LDQ0196S



Model No: MD-LDM0196S	Surface Treatment: WH
Power: SMD 96W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 8000Lm	Working Temperature: -10~45° C
CRt: ≥70	IP: 20
Beam Angle: 120°	Body Size: 595*595*31mm
Color Temperature: 6500/4000/3000K	Hole Size: /




MD-LDM0196S



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-LDQ0196S	SMD 96W	9600Lm	120°	WH	595x595x28mm	575x575mm
MD-LDQ0196S	SMD 96W	8000Lm	120°	WH	595x595x28mm	575x575mm
MD-LDM0196S	SMD 96W	8000Lm	120°	WH	595x595x31mm	/
MD-LDJ0196S	SMD 96W	8000Lm	120°	WH	598x598x29mm	/




LED Gill Light V.MAX[®]

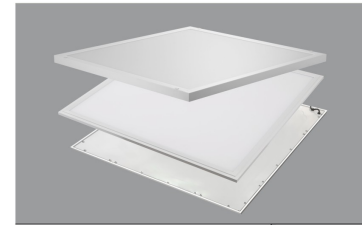

Model No: V-126060-60	Surface Treatment: WH/SL
Power: SMD 60W	Life Span: 30000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 5400Lm	Working Temperature: -10~45° C
CRt: ≥80	IP: 20
Beam Angle: 120°	Body Size: 595*595*8mm
Color Temperature: 6500/4000/3000K	Hole Size: /





V-126060-60





Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
V-126060-60	SMD 60W	5400Lm	120°	WH	595x595x8mm	/
V-126060A-MZ	SMD 60W	5600Lm	120°	WH	595x595x8mm	/

Model No: MD-126060-40	Surface Treatment: WH/SL
Power: SMD 40W	Life Span: 25000H
Input Voltage: AC220-240V 50/60Hz	Material: Alum+PC
Luminous Flux: 3600Lm	Working Temperature: -10~45° C
CRt: ≥80	IP: 20
Beam Angle: 120°	Body Size: 595*595*8mm
Color Temperature: 6500/4000/3000K	Hole Size: /

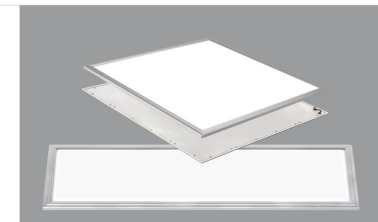

MD-126060-80



Products list

Model No.	Power	Luminous Flux	Beam angle	Surface	Body Size	Hole Size
MD-126060-40	SMD 40W	3600Lm	120°	WH	595x595x8mm	/
MD-126060-60	SMD 60W	5800Lm	120°	WH	595x595x8mm	/
MD-126060-80 JC	SMD 60W	5800Lm	120°	WH	600x600x15mm	/
MD-126060-80	SMD 80W	7000Lm	120°	WH	595x595x8mm	/
MD-1230120-60	SMD 60W	5200Lm	120°	WH	1195x297x9mm	/